




PRODUCT SPECIFICATION: KM-1027-3 240V/1PH

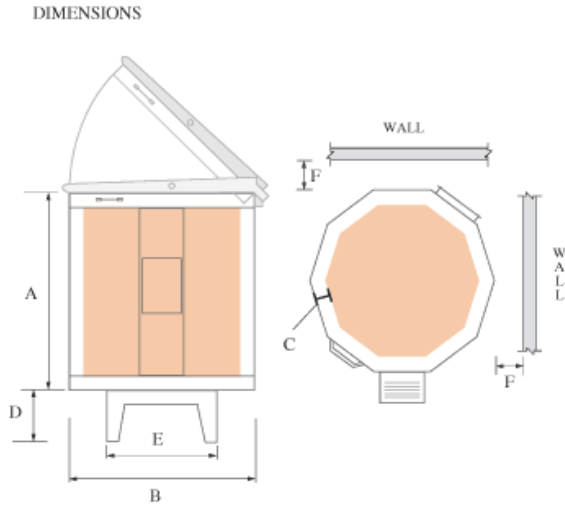

SPECIFICATIONS & DIMENSIONS

MODEL	Phase	Volts	Maximum		Chamber			O.D.Dimension						Power		Copper Wire Size	NEMA Recp. Conf.	BTU's
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts			
KM-1027-3 240V/1PH	1	240	10	2350	27	22.00	6.4	33	28.5	3	8	17	18	48	11520	6	6-50	18940

OPTIONAL ACCESSORIES

	Optional
1027 ROLLING KILN STAND	Optional
1027-3 X 5/8 POST FURN. KIT	Optional
EASY VIEW	Optional
ENVIROLINK	Optional
ENVIROVENT 2	Optional
ENVIROVENT 2 EXTENSION KIT	Optional
LID LIFTER KIT FOR 3" BRICK 10 SIDED KILNS	Optional
APM ELEM UPGRADE(ZC) FOR #1458	Optional
APM ELEMENT UPGRADE FOR #1458	Optional
ZONE CONTROL UPGRADE	Optional

CONTROLLER

Thermocouple: Type K
 Clock: 60 Mhz
 Voltage: 24 DC Relays
 Output: 12 Volts DC
 Fuse: 2 AMP



Print this page