




# PRODUCT SPECIFICATION: KM-1218 240V/3PH



DIMENSIONS

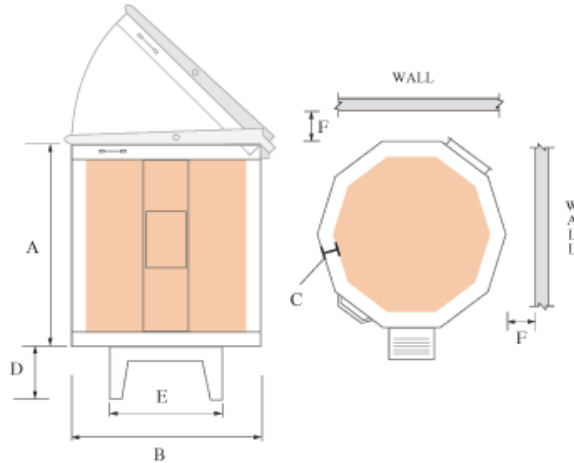

SPECIFICATIONS & DIMENSIONS

MODEL	Phase	Volts	Maximum		Chamber			O.D.Dimension						Power		Copper Wire Size	NEMA Recp. Conf.	BTU's
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts			
KM-1218 240V/3PH	3	240	10	2350	18	28.00	6.6	24	34	3	8	17	18	29.3	11520	8	15-50	19690

OPTIONAL ACCESSORIES

	Optional
1218, 1222 FURNITURE KIT	Optional
1227 ROLLING KILN STAND	Optional
EASY VIEW	Optional
ENVIROLINK	Optional
ENVIROVENT 2	Optional
ENVIROVENT 2 EXTENSION KIT	Optional
LID LIFTER KIT FOR 12 SIDED KILNS	Optional
APM ELEM UPGRADE FOR #2264/#2266	Optional

CONTROLLER

Thermocouple: Type K  
 Clock: 60 Mhz  
 Voltage: 24 DC Relays  
 Output: 12 Volts DC  
 Fuse: 2 AMP

