




**SKUTT**  
CERAMIC PRODUCTS

# PRODUCT SPECIFICATION: KM-1222-3 240V/3PH



DIMENSIONS

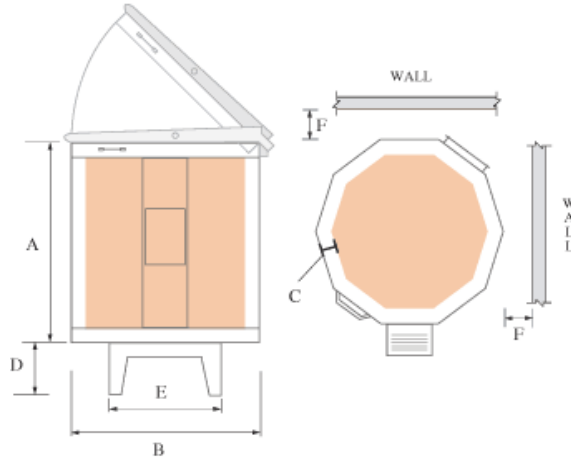

**SPECIFICATIONS & DIMENSIONS**

MODEL	Phase	Volts	Maximum		Chamber			O.D.Dimension						Power		Copper Wire Size	NEMA Recp. Conf.	BTU's
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts			
KM-1222-3 240V/3PH	3	240	10	2350	22	28.00	8.1	28	34	3	8	17	18	34.6	11520	8	15-50	22120

**OPTIONAL ACCESORIES**

	Optional
1227 FURNITURE KIT	Optional
1227 ROLLING KILN STAND	Optional
EASY VIEW	Optional
ENVIROLINK	Optional
ENVIROVENT 2	Optional
ENVIROVENT 2 EXTENSION KIT	Optional

**CONTROLLER**

Thermocouple: Type K  
 Clock: 60 Mhz  
 Voltage: 24 DC Relays  
 Output: 12 Volts DC  
 Fuse: 0 AMP



Print this page