




# PRODUCT SPECIFICATION: KM-1227PK/208V 3PH LL



DIMENSIONS

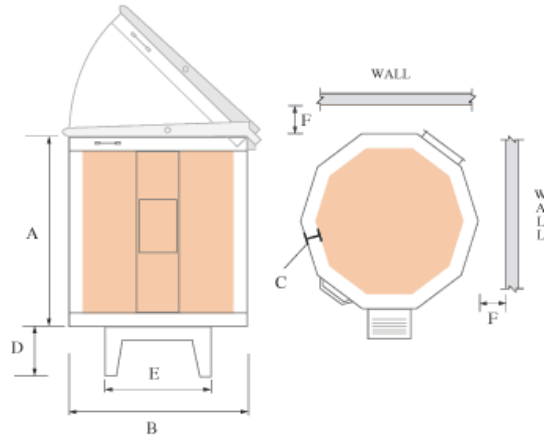

SPECIFICATIONS & DIMENSIONS

MODEL	Phase	Volts	Maximum		Chamber			O.D.Dimension						Power		Copper Wire Size	NEMA Recp. Conf.	BTU's
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts			
KM-1227PK/208V 3PH LL	3	208	10	2350	27	28.00	9.9	33	34	3	8	17	18	46.7	14300	6	Direct Wire	24540

OPTIONAL ACCESSORIES

	Optional
1227 FURNITURE KIT	Optional
1227 ROLLING KILN STAND	Optional
EASY VIEW	Optional
ENVIROLINK	Optional
ENVIROVENT 2	Optional
ENVIROVENT 2 EXTENSION KIT	Optional
LID LIFTER KIT FOR 12 SIDED KILNS	Optional
APM ELEMENT UPPGRADE FOR #1577	Optional
ZONE CONTROL UPGRADE	Optional

CONTROLLER

Thermocouple: Type K  
 Clock: 60 Mhz  
 Voltage: 24 DC Relays  
 Output: 12 Volts DC  
 Fuse: 2 AMP

