




# PRODUCT SPECIFICATION: KM-822-3 240V/1PH



## DIMENSIONS

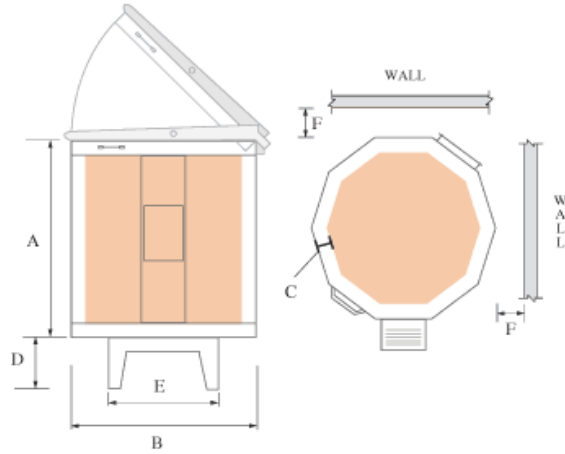

## SPECIFICATIONS & DIMENSIONS

MODEL	Phase	Volts	Maximum		Chamber			O.D.Dimension						Power		Copper Wire Size	NEMA Recp. Conf.	BTU's
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts			
KM-822-3 240V/1PH	1	240	10	2350	22	17.00	2.9	28	22.5	2.5	8	17	18	33.4	8000	8	6-50	12260

## OPTIONAL ACCESSORIES

	Optional
818 ROLLING KILN STAND	Optional
818, 822 FURNITURE KIT	Optional
EASY VIEW	Optional
ENVIROLINK	Optional
ENVIROVENT 2	Optional
ENVIROVENT 2 EXTENSION KIT	Optional

## CONTROLLER

Thermocouple: Type K  
 Clock: 60 Mhz  
 Voltage: 24 DC Relays  
 Output: 12 Volts DC  
 Fuse: 0 AMP



Print this page